
HBS-DP LOW PROFILE HYDRAULIC CYLINDER

Low profile cylinders for lifting under machines and in tight gaps where closed height is limited.

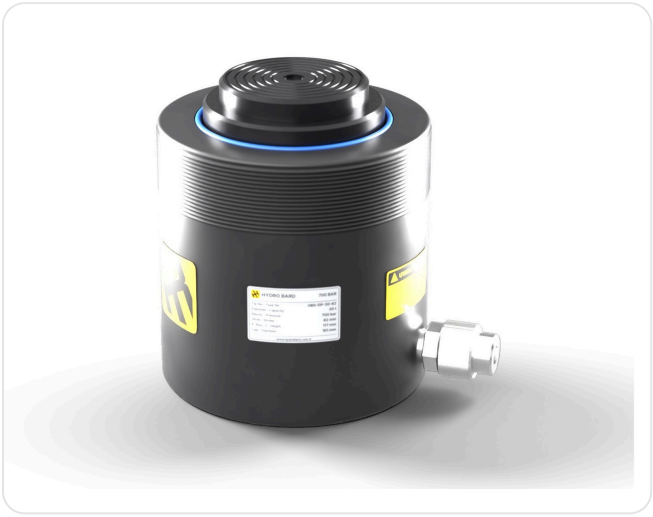

700 bar
WORKING PRESSURE

10–90 ton
CAPACITY

5 models
MODELS

Single-acting · spring return

- Body: 7075-T6 aluminium alloy, hard anodised
- Base: wide contact face, hardened steel
- Port: 3/8″ NPT/F, quick coupler
- Short closed height, wide base
- Max. working pressure 700 bar (10,153 psi)

MODEL TABLE

Model Code	Capacity t / kN	Stroke mm	Closed Height A mm	Extended Height B mm	Outer Dia. D mm	Oil Volume cm³	Weight kg
HBS-DP-10-38	10 / 101	38	88	126	69	55	1.0
HBS-DP-20-45	20 / 201	45	98	143	92	129	1.9
HBS-DP-30-62	30 / 295	62	117	179	101	261	2.5
HBS-DP-45-60	45 / 435	60	122	182	124	373	3.7
HBS-DP-90-57	90 / 887	57	141	198	165	722	7.7

A: closed height, B: extended height, D: outer diameter. Forces are given at 700 bar. Dimensions are for information and confirmed before order. Strokes and capacities not listed are made to order.

MANUFACTURER
Hydro Bard Mühendislik
İvedik OIZ, 1436. Cadde No:14
Yenimahalle / Ankara / Türkiye

CONTACT
+90 545 209 22 08
info@hydrobard.com

PRODUCT PAGE
hydrobard.com/en/low-profile-cylinder.html